


安装尺寸 MOUNTING DIMENSION

MS3009

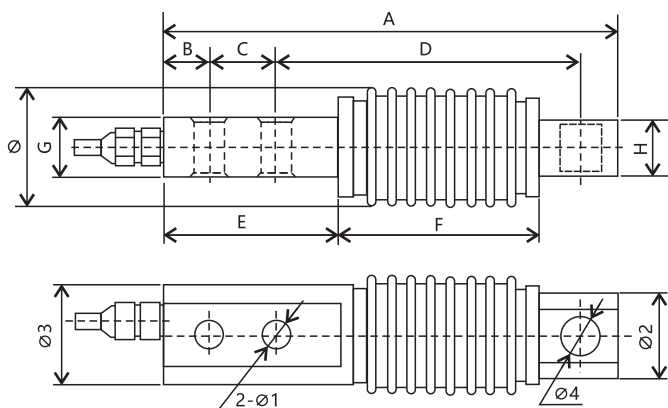

量程		尺寸/mm													
KN	相当于kg	A	B	C	D	E	F	G	H	Ø	Ø1	Ø2	Ø3	Ø4	
0.1~5	10~500	123	13	18	82	45	59	22	20	45	8.5	27	32	11	
7~10	700~1000	210	15	40	133	93	64	34	25	60	13	35	50	14	

技术参数 TECHNICAL PARAMETERS


参数	Specifications	技术指标/Technique
输出灵敏度	Rated output	2.0±0.1mV/V
零点输出	Zero balance	±0.05%F.S.
非线性	Non-linearity	0.015%F.S.
滞后	Hysteresis	0.015%F.S.
重复性	Repeatability	0.015%F.S.
蠕变(30min)	Creep(30min)	0.0166%F.S.
温度灵敏度漂移	Temp.effect on output	0.02%F.S./10℃
零点温度漂移	Temp.effect on zero	0.03%F.S./10℃
输入电阻	Input impedance	405±20Ω
输出电阻	Output impedance	350±10Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Recommended excitation	5~15V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated temp range	-10~40℃
工作温度范围	Operation temp range	-10~50℃
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	4-Φ1x100mm
材料	Material	stainless steel(不锈钢)
防护等级	IP Class	IP68
最大秤盘尺寸	Max.platform size	50mmx50mm



特点和用途 FEATURES & APPLICATIONS

- ◆ 不锈钢或合金钢材料、IP68
- ◆ 精度高、重心低，抗偏载强
- ◆ 容易安装，互换性好
- ◆ 适用于电子秤、汽车衡、平台称等
- ◆ Stainless steel or alloy steel material, IP68.
- ◆ High precision, low center of gravity, strong bias load resistance
- ◆ Easy to install, good interchangeability
- ◆ Applicable to electronic scale, truck scale, platform scale, etc

受力方式 Load Direction

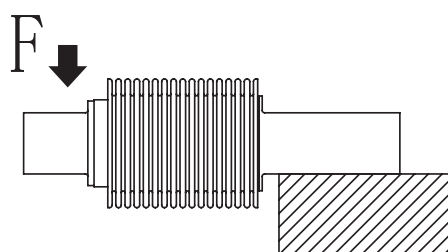

配线图 Wiring Code

