
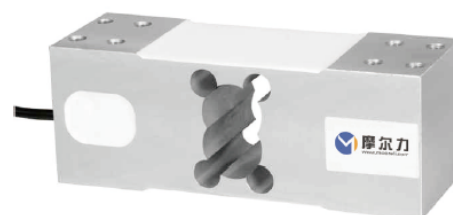


安装尺寸 MOUNTING DIMENSION

MS3040

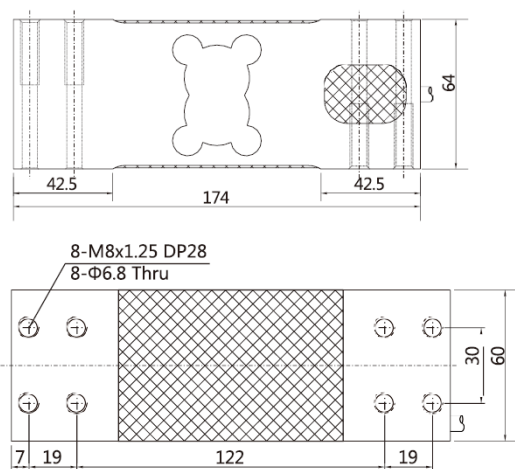

技术参数 TECHNICAL PARAMETERS


参数	Specifications	技术指标/Technique
额定容量	Capacity	60~1000kg
精度等级	Accuracy class	C3
输出灵敏度	Rated output	2.0±5% mV/V
零点输出	Zero balance	±1%F.S.
非线性	Non-linearity	0.015%F.S.
滞后	Hysteresis	0.015%F.S.
重复性	Repeatability	0.01%F.S.
蠕变(30min)	Creep(30min)	0.01%F.S.
温度灵敏度漂移	Temp.effect on output	0.02%F.S./10℃
零点温度漂移	Temp.effect on zero	0.02%F.S./10℃
输入电阻	Input impedance	405±10Ω
输出电阻	Output impedance	305±3Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Excitation Voltage	5~15V
最大激励电压	Maximum excitation Voltage	15V
温度补偿范围	Compensated temp range	-30~70℃
工作温度范围	Operation temp range	-20~60℃
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	Φ5mm×2mm
材料	Material	Aluminum alloy(铝合金)
防护等级	IP Class	IP65
最大秤盘尺寸	Max.platform size	800mm x800mm

特点和用途 FEATURES & APPLICATIONS

- ◆ 铝合金材料
- ◆ 精度高, 容易安装, 互换性好
- ◆ 广泛用于计价秤, 计数秤, 平台秤等

- ◆ Aluminium alloy material
- ◆ High precision, easy to install, good interchangeability.
- ◆ Widely used in pricing scales, counting scales, platform scales, etc.

受力方式 Load Direction

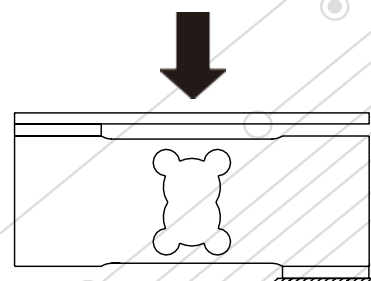

配线图 Wiring Code

