


安装尺寸 MOUNTING DIMENSION

MS3030

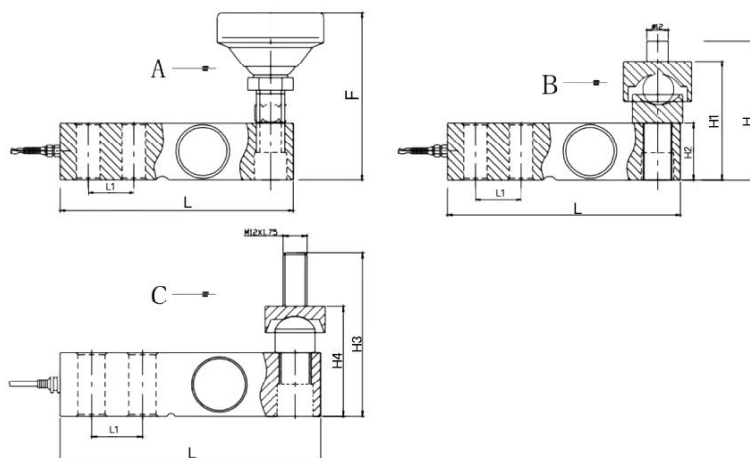

量程 (t)	尺寸:mm							
	L	L1	H	H1	H2	H3	H4	F
0.3~3	130	25.4	78	66	32	84.5	57	94

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
额定容量	Capacity	0.3~3T
输出灵敏度	Rated output	2.0/3.0±0.002%V/V
零点输出	Zero balance	±1%F.S.
非线性	Non-linearity	±0.02%F.S.
滞后	Hysteresis	±0.02%F.S.
重复性	Repeatability	±0.02%F.S.
蠕变(30min)	Creep(30min)	±0.02%F.S.
温度灵敏度漂移	Temp.effect on output	0.02%F.S/10℃
零点温度漂移	Temp.effect on zero	0.02%F.S/10℃
输入电阻	Input impedance	400±20Ω
输出电阻	Output impedance	350±2Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Excitation Voltage	5~15V
最大激励电压	Maximum excitation Voltage	15V
温度补偿范围	Compensated temp range	-30~70℃
工作温度范围	Operation temp range	-20~60℃
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	3M 5M 9M
材料	Material	合金钢/不锈钢
防护等级	IP Class	IP65



特点和用途 FEATURES & APPLICATIONS

- ◆ 合金钢材料，稳定性强
- ◆ 精度高、抗偏载能力强
- ◆ 容易安装，IP65
- ◆ 本产品采用支脚、不倒翁、上下压头等组件，安装方便，适用于单双层台面的电子平台秤等称重系统。

- ◆ Alloy steel material, high stability
- ◆ High precision, strong anti-bias load ability
- ◆ Easy to install, IP65
- ◆ Combined with support or tumble or pressure head subassembly, Easy installation, it's suitable for single electronic platform scale and other weighing system.

受力方式 Load Direction



配线图 Wiring Code

