


安装尺寸 MOUNTING DIMENSION

MS3032

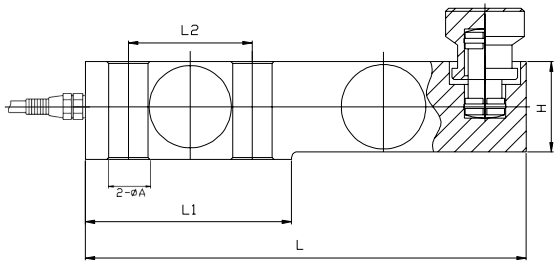

外型尺寸 Dimensions

量程(t)	L(mm)	L1(mm)	L2(mm)	H(mm)	A
5-8	235	110	66	52	20
10	279	133	82.5	67	28
20	318	153	89	82.5	34

技术参数 TECHNICAL PARAMETERS


参数	Specifications	技术指标/Technique
量程范围	Capacity	5~20T
精度等级	Accuracy Class	C2,C3
额定输出	Rated output	2.0±0.002mV/V
零点	Zero balance	±1%F.S.
非线性	Non-linearity	±0.02%F.S.
滞后	Hysteresis	±0.02%F.S.
重复性	Repeatability	±0.02%F.S.
蠕变(30min)	Creep(30min)	±0.02%F.S.
温度灵敏度漂移	Temp effect on output	±0.02%F.S./10°C
零点温度漂移	Temp effect on zero	±0.02%F.S./10°C
输入电阻	Input impedance	400±20Ω
输出电阻	Output impedance	350±2Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Excitation Voltage	5~15VDC
最大激励电压	Maximum excitation Voltage	15VDC
温度补偿范围	Compensated temp range	-30~70°C
工作温度范围	Operation temp range	-20~60°C
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	4M 9M
防护等级	Protection class	IP67

特点和用途 FEATURES & APPLICATIONS

- ◆ 本产品采用不锈钢不倒翁或压头组件
- ◆ 精确度高，防侧向能力强、通用性强
- ◆ 适用于单双层台面电子平台秤。

- ◆ This product adopts stainless steel non-inverted or indenter assembly
- ◆ High accuracy, strong anti-lateral ability and versatility.
- ◆ Suitable for single and double deck electronic platform scales.

受力方式 Load Direction



配线图 Wiring Code

