
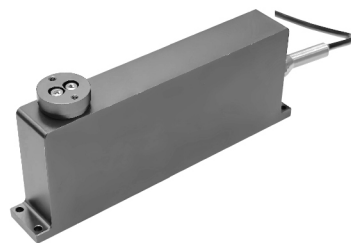


安装尺寸 MOUNTING DIMENSION

MS8093

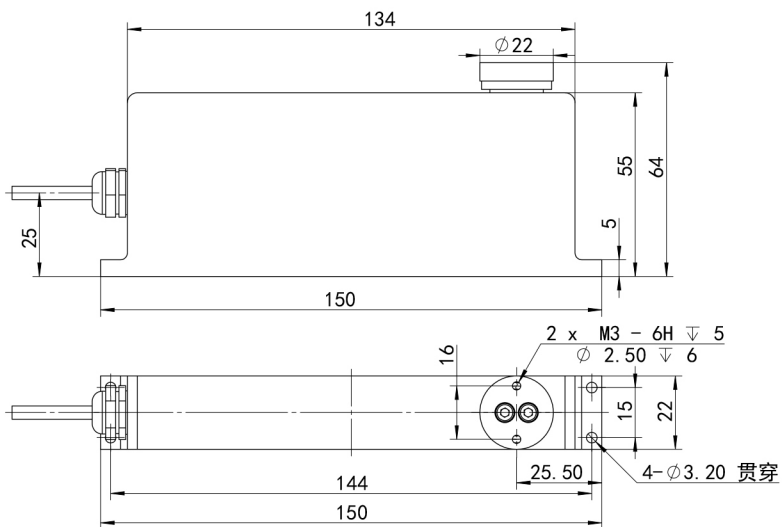


特点和用途 FEATURES & APPLICATIONS

- ◆ 电子称，称重模块
- ◆ 精度高，安装便捷，可列阵组合多线称重
- ◆ 适用于片剂、点胶、注液系统、胶囊等称重检测
- ◆ Electronic weighing module
- ◆ High precision, convenient installation, array combination multi-line weighing
- ◆ Suitable for tablet, dispensing, liquid injection system, capsule weighing test

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
量程范围	Capacity	150、300g
灵敏度	Rated output	1.5 $\pm$ 20mV/V
零点	Zero balance	$\pm$ 0.05mV/V
非线性	Non-linearity	$\leq$ 0.01%F.S.
滞后	Hysteresis	$\pm$ 0.01%F.S.
重复性	Repeatability	$\pm$ 0.01%F.S.
蠕变(30min)	Creep(30min)	$\pm$ 0.01%F.S.
温度灵敏度漂移	Temp effect on output	$\pm$ 0.01%F.S.
零点温度漂移	Temp effect on zero	0.01%F.S./10 $^{\circ}$ C
输入电阻	Input impedance	410 $\pm$ 10 Ω
输出电阻	Output impedance	350 $\pm$ 5 Ω
绝缘电阻	Insulation	$\geq$ 5000M Ω /100VDC
激励电压	Excitation Voltage	5~15V
最大激励电压	Maximum excitation Voltage	20V
温度补偿范围	Compensated temp range	-10~60 $^{\circ}$ C
工作温度范围	Operation temp range	-20~80 $^{\circ}$ C
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	300%F.S.
电缆线尺寸	Cable size	ϕ 4 $\times$ 3000mm
材料	Material	铝合金
防护等级	Protection class	IP65

受力方式 Load Direction

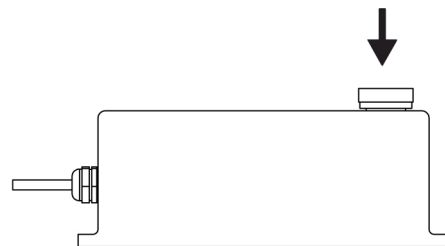

配线图 Wiring Code

