


安装尺寸 MOUNTING DIMENSION


MS8094

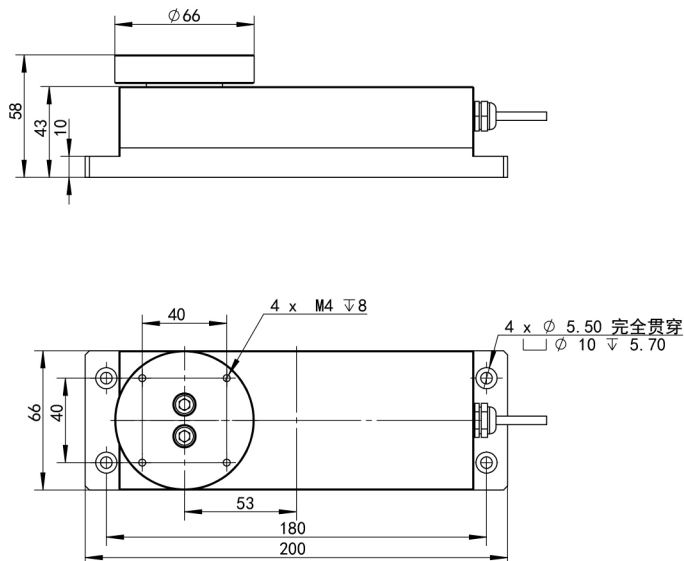


特点和用途 FEATURES & APPLICATIONS

- ◆ 电子称，称重模块
- ◆ 精度高，安装便捷，可列阵组合多线称重
- ◆ 适用于片剂、点胶、注液系统、胶囊等称重检测
- ◆ Electronic weighing module
- ◆ High precision, convenient installation, array combination multi-line weighing
- ◆ Suitable for tablet, dispensing, liquid injection system, capsule weighing test

受力方式 Load Direction

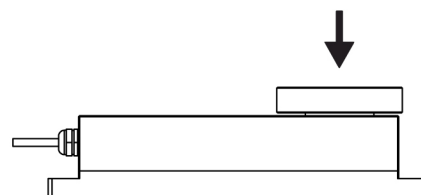

配线图 Wiring Code

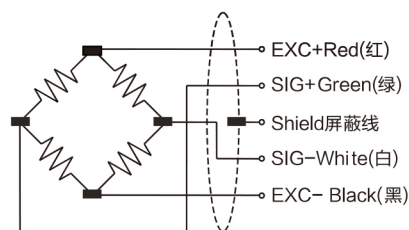

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
量程范围	Capacity	5,10,20,50KG
灵敏度	Rated output	2.0±20% mV/V
零点	Zero balance	±0.05 mV/V
非线性	Non-linearity	≤0.01%F.S.
滞后	Hysteresis	±0.01%F.S.
重复性	Repeatability	±0.01%F.S.
蠕变(30min)	Creep(30min)	±0.01%F.S.
温度灵敏度漂移	Temp effect on output	±0.01%F.S.
零点温度漂移	Temp effect on zero	0.01%F.S./10°C
输入电阻	Input impedance	350±10Ω
输出电阻	Output impedance	350±5Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Excitation Voltage	5~15V
最大激励电压	Maximum excitation Voltage	20V
温度补偿范围	Compensated temp range	-10~60°C
工作温度范围	Operation temp range	-20~80°C
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	300%F.S.
电缆线尺寸	Cable size	Φ4×3000mm
材料	Material	铝合金
防护等级	Protection class	IP65