

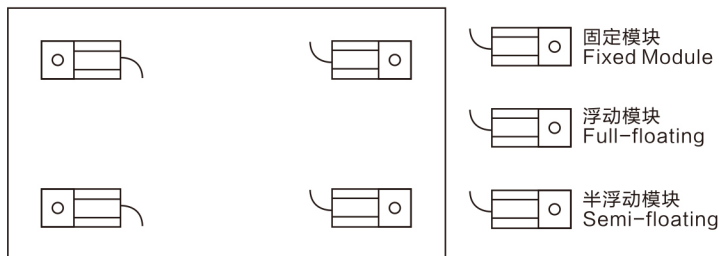
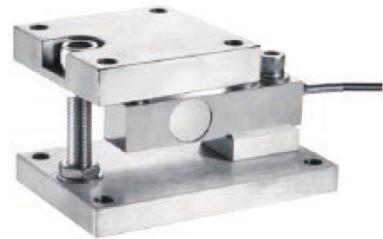


安装尺寸 MOUNTING DIMENSION


MS3008-MK

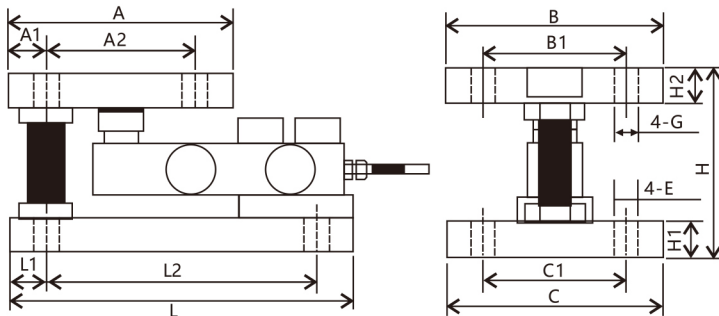



注：需配接线盒MI4001整合信号并输出



切向安装
Tangential mounting



径向安装
Radial mounting



技术参数 TECHNICAL PARAMETERS


量程/Capacity (t)	材料/Material	重量/Weight
0.5/1/1.5/2/2.5 /2.5/3/5/7.5/10	不锈钢/Stainless steel 合金钢/Alloy steel	7.0kg

Capacity (t)	L	L1	L2	A	A1	A2	B	B1	C	C1	H	H1	H2	G	E
0.5/1/1.5/2/2.5	177.8	12.7	152.4	114.3	12.7	88.9	113.3	88.9	114.3	88.9	104.8	19	25.4	Ø11	Ø11
3/5	235	25.4	184.2	152.4	25.4	101.6	152.4	101.6	152.4	101.6	136.5	25	31	Ø17.5	Ø17.5
7.5/10	355.6	25.4	304.8	203.2	25.4	152.4	203.2	152.4	203.2	152.4	190.5	44.5	44.5	Ø20.6	Ø20.6

特点和用途 FEATURES & APPLICATIONS

- ◆ 不锈钢或合金钢材料
- ◆ 与传感器MS3008配套使用
- ◆ 用于各类地衡、汽车综合性能检测线、料斗秤托盘称、台秤
- ◆ Stainless steel or alloy steel material
- ◆ Compatible with sensor MS3008
- ◆ Used for all kinds of ground scale, automobile comprehensive performance test line, hopper scale pallet, platform scale

受力方式 Load Direction

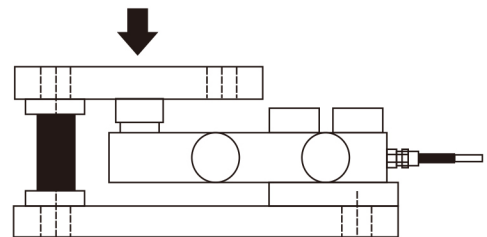

配线图 Wiring Code

