
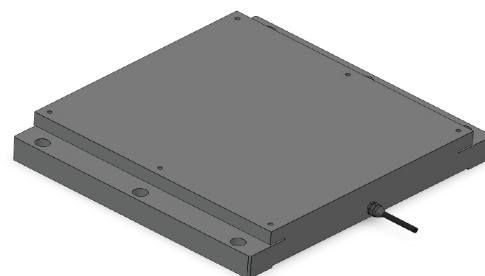


安装尺寸 MOUNTING DIMENSION

MS8022

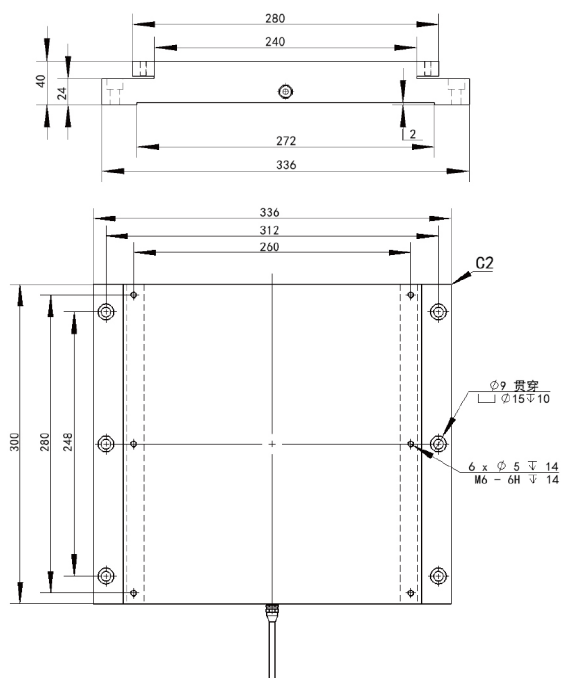


特点和用途 FEATURES & APPLICATIONS

- ◆ 平板式压力传感器
- ◆ 合金刚材料
- ◆ IP65
- ◆ 用于新能源压机
- ◆ Plate type pressure sensor
- ◆ Alloy rigid material
- ◆ IP65
- ◆ Used for new energy pressing machine

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
额定容量	Capacity	23T
输出灵敏度	Rated output	1.0+10% mV/V
零点输出	Zero balance	$\pm 0.2mV/V$
非线性	Non-linearity	0.1%F.S.
滞后	Hysteresis	0.1%F.S.
重复性	Repeatability	0.1%F.S.
温度灵敏度漂移	Temp.effect on output	0.1%F.S./10 $^{\circ}C$
零点温度漂移	Temp.effect on zero	0.1%F.S./10 $^{\circ}C$
输入电阻	Input impedance	1500 $\pm 20\Omega$
输出电阻	Output impedance	1400 $\pm 10\Omega$
绝缘电阻	Insulation	$\geq 5000M\Omega/100VDC$
激励电压	Excitation Voltage	5V
最大激励电压	Maximum excitation Voltage	15V
温度补偿范围	Compensated temp range	-10 $\sim$ 40 $^{\circ}C$
工作温度范围	Operation temp range	-20 $\sim$ 50 $^{\circ}C$
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	$\Phi 5 \times 5000mm$
防护等级	IP Class	IP65

受力方式 Load Direction

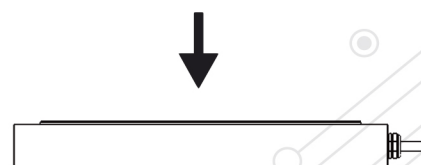

配线图 Wiring Code

