


安装尺寸 MOUNTING DIMENSION

MS6032

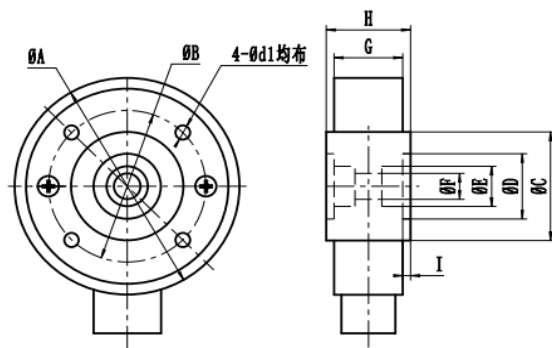

量程 N 尺寸 (mm)	A	B	C	D	E	F	G	H	I	d1
50-150	93	64	45	26	16	9	30.5	37.5	3.5	5.5
50-50	100	70	50	30	18.5	12	30.5	37.5	3.5	6.6
150-1000	105	75	60	40	20	17	30.5	37.5	3.5	6.6
150-1500	125	95	70	45.5	33	20	40	48	4	7
375-3000	175	135	100	70	44	35	57	65	4	9
750-12000	225	175	130	80	64	50	66	76	4	11


技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
额定容量	Capacity	50,150,500,1000,1500,3000,12000N
输出灵敏度	Rated output	1.0±20% mV/V
零点输出	Zero balance	±2% F.S.
非线性	Non-linearity	0.5% F.S.
滞后	Hysteresis	0.2% F.S.
重复性	Repeatability	0.2% F.S.
温度灵敏度漂移	Temp. effect on output	0.05% F.S./10°C
零点温度漂移	Temp. effect on zero	0.05% F.S./10°C
输入电阻	Input impedance	800~1100Ω
输出电阻	Output impedance	800~1100Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Recommended excitation	5~12V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated temp range	-10~60°C
工作温度范围	Operation temp range	-20~80°C
安全超载	Safe overload	150% F.S.
极限超载	Ultimate overload	200% F.S.
电缆线尺寸	Cable size	Φ4x3000mm

特点和用途 FEATURES & APPLICATIONS

- ◆ 结构紧凑，综合精度高，长期稳定性好
- ◆ 材质为合金钢，耐腐蚀，耐油污
- ◆ 主要用于纺织，涂布机，绕线机等各种自动化设备张力控制与检测
- ◆ Compact structure, high comprehensive accuracy and
- ◆ good long-term stability
- ◆ The material is alloy steel, resistant to corrosion and oil
- ◆ Mainly used in textile, coater, winding machine and other automatic equipment tension control and detection

受力方式 Load Direction



配线图 Wiring Code

