


安装尺寸 MOUNTING DIMENSION

MS6029

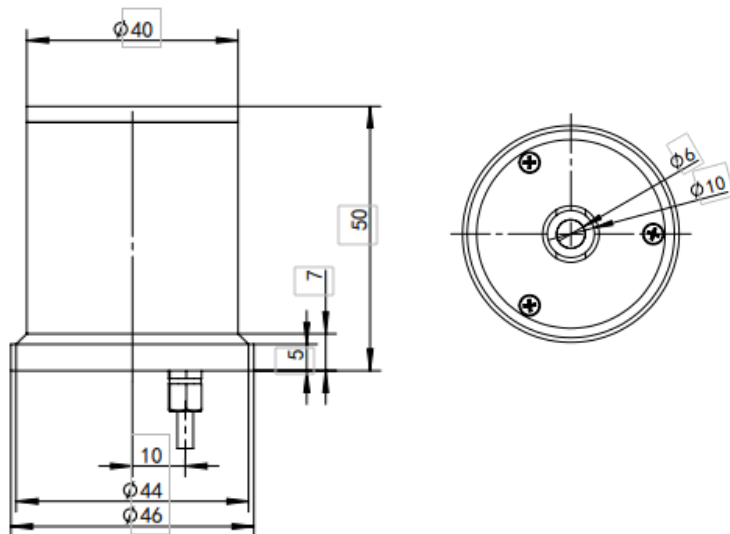

特点和用途 FEATURES & APPLICATIONS


- ◆ 铝合金材料, 精
- ◆ 度高、防过载
- ◆ 容易安装

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
量程范围	Capacity	500,1000G
灵敏度	Rated output	$1.0 \pm 20\% \text{mV/V}$
零点	Zero balance	$\pm 0.05 \text{mV/V}$
非线性	Non-linearity	$\leq 0.05\% \text{F.S.}$
滞后	Hysteresis	$\pm 0.05\% \text{F.S.}$
重复性	Repeatability	$\pm 0.05\% \text{F.S.}$
蠕变(30min)	Creep(30min)	$\pm 0.05\% \text{F.S.}$
温度灵敏度漂移	Temp effect on output	$\pm 0.05\% \text{F.S.}$
零点温度漂移	Temp effect on zero	$0.05\% \text{F.S.}/10^\circ\text{C}$
输入电阻	Input impedance	$350 \pm 10\Omega$
输出电阻	Output impedance	$350 \pm 5\Omega$
绝缘电阻	Insulation	$\geq 5000 \text{M}\Omega/100 \text{VDC}$
激励电压	Excitation Voltage	5~15V
最大激励电压	Maximum excitation Voltage	20V
温度补偿范围	Compensated temp range	$-10 \sim 60^\circ\text{C}$
工作温度范围	Operation temp range	$-20 \sim 80^\circ\text{C}$
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	300%F.S.
电缆线尺寸	Cable size	$\Phi 3 \times 3000 \text{mm}$
材料	Material	铝合金外壳

- ◆ Aluminum alloy
- ◆ material, high precision, anti-overload and easy installation

受力方式 Load Direction



配线图 Wiring Code

