


安装尺寸 MOUNTING DIMENSION

MS6023

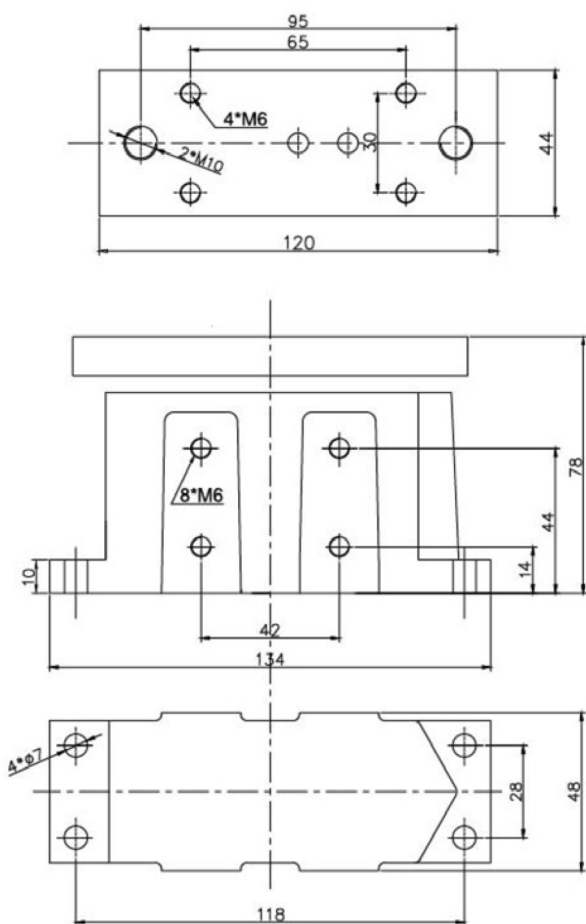

特点和用途 FEATURES & APPLICATIONS

- ◆ 结构紧凑、安装方便
- ◆ 高精度0.025%配对销售, 无需个别补正
- ◆ 采用不锈钢材质制造, 拥有极高的抗扭性能
- ◆ 高达IP67的防护等级, 适应各种特殊环境要求
- ◆ 采用机械挡块进行过载保护
(提供3倍以上过载保护)

- ◆ Compact and easy to install
- ◆ High precision 0.025% matching sales, without individual correction
- ◆ Made of stainless steel, with high torsion resistance.
- ◆ Up to IP67 protection level, adapt to a variety of special environmental requirements
- ◆ Mechanical stopper for overload protection
(Provide more than 3 times overload protection)

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
额定容量	Rated capacity	15~100kg
输出电压	Rated temperature	0~20mV
综合误差	Storage temperature	±0.05%
温度范围	Maximum allowable voltage	-30~+100℃
绝缘电阻	Insulation	≥5000MΩ
安全过载	Weight	150%
极限过载	Ultimate overload	300%
电源输入	Power input	10VDC/AC
材质	Material	铝合金/不锈钢
防护等级	Protection class	IP67/IP68

受力方式 Load Direction

