


安装尺寸 MOUNTING DIMENSION

MI1064

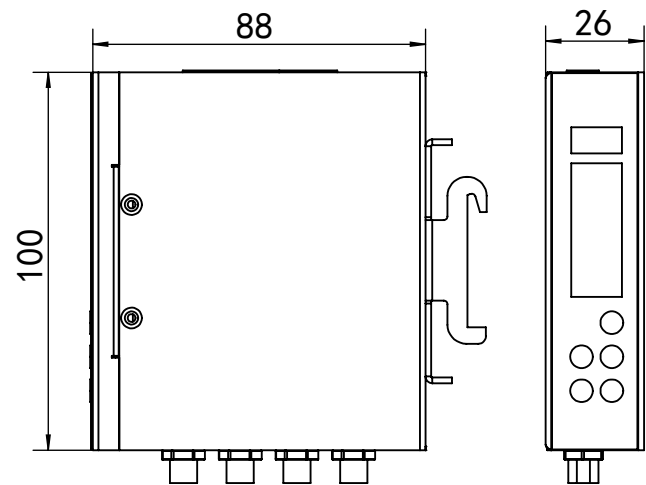

特点和用途 FEATURES & APPLICATIONS

- 带TEDS航插(可选)免标定
- 四通道输入, RS485/RS232通信方式
- 通道切换及显示, 力值显示
- 4800~230400波特率自适应特性
- With TEDS aerial plug (optional) calibration-free
- Four input channels, RS485/RS232
- communication mode
- Channel switching and display, force value display
- 4800~230400 baud rate adaptive features

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
工作电压	Power supply	24VDC±30%
最大功耗	Maximum power consumption	3W
显示位数	Digits	5
4路称重信号输入	4 weighing signal input	0~39mV
激励电压	Excitation voltage output	5VDC
输入负载能力	Input load	350Ω/4
零位漂移	Zero drift	±0.1μV/℃
增益漂移	Gain drift	±5ppm/℃
标定方式	Electronic identification	数字/两点标定, TEDS免标定
综合精度	Accuracy class	0.01%F.S.
通讯接口	Communication interface	RS485/RS232
存储温度	Storage temperature	-30~80℃
工作温度	Operation temperature range	-10~60℃
重量	Weight	0.2kg
采集频率	Acquisition frequency	≤1280HZ
通讯协议	Communication protocol	Modbus RTU、ARSCII