


安装尺寸 MOUNTING DIMENSION

MI2022

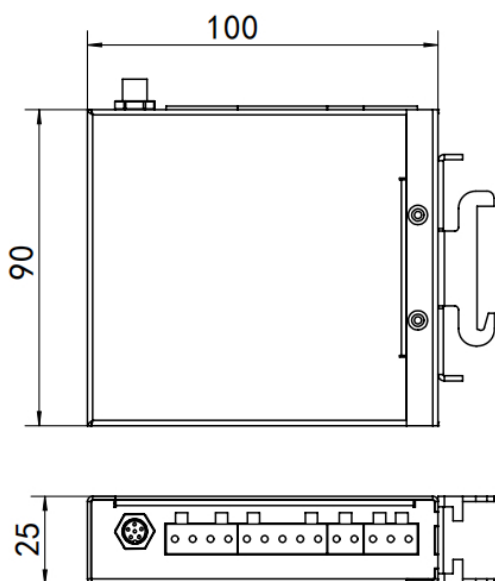

特点和用途 FEATURES & APPLICATIONS

- 模拟量输出可选择: 0-10V, $\pm 10V$, 0-5V, 4-20mA
- 通信方式 RS485/RS232
- 一路输入一路输出
- TEDS免标定, 简化校准流程
- 卡槽导轨式, 安装方便, 性价比高
- Analogue output selectable: 0-10V, $\pm 10V$, 0-5V, 4-20mA
- Communication mode RS485/RS232
- One input and one output
- TEDS calibration-free, simplify the calibration process
- Slot rail type, easy to install, cost-effective

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
工作电压	Power supply	9-30VDC/AC
最大功耗	Maximum power consumption	5W
通讯接口	Communication interface	RS485/RS232
通讯协议	Communication protocol	Modbus RTU、ARSCIL
激励电压	Excitation voltage output	5VDC
输入负载能力	Input load	350 Ω /4
输入输出通道	Input/output channel	1 路输入 1 路输出
信号输入范围	Signal Input	0.4-6mV/V
标定方式	Electronic identification	砵码两点标定/TEDS免标定
综合精度	Accuracy class	0.01%F.S.
采集频率	Acquisition frequency input	1000-10000HZ
零位漂移	Zero drift	$\pm 0.1\mu V/^{\circ}C$
增益漂移	Gain drift	$\pm 5ppm/^{\circ}C$
存储温度	Storage temperature	-30~80 $^{\circ}C$
工作温度	Operation temperature range	-10~60 $^{\circ}C$
外壳材料	Material	铁壳(iron shell)
防护等级	Protection class	IP65
重量	Weight	0.25kg