


安装尺寸 MOUNTING DIMENSION

MI1045

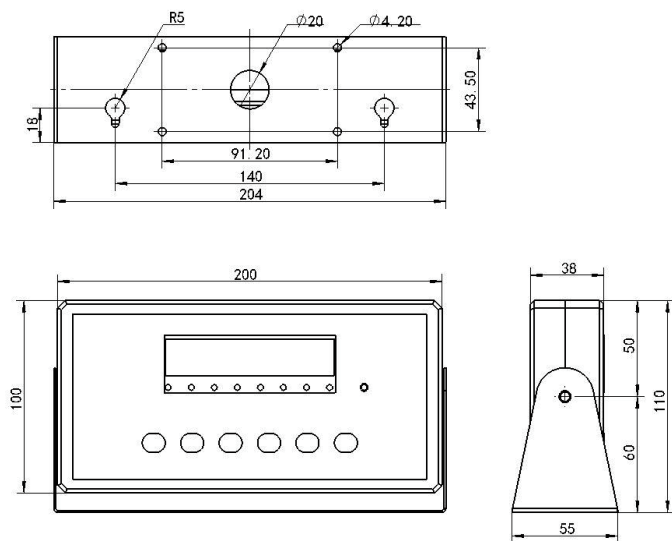

特点和用途 FEATURES & APPLICATIONS

- 通信方式:RS232或蓝牙
- 支持 1,000,000 显示分度
- 9600波特率自适应特性
- 轻触式按键自动清零
- Communication method :RS232 or Bluetooth
- Support 1,000,000 display indexing
- 9600 baud rate adaptive feature
- Touch key automatically clear zero

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
工作电压	Power supply	3.5~4.2VDC
大功耗	Maximum power consumption	5W
显示位数	Digits	7
激励电压	Excitation voltage output	5VDC
输入负能力	Input load	350Ω/4
零位漂移	Zero drift	±0.1μV/°C
增益漂移	Gain drift	±5ppm/°C
标定方式	Electronic identification	数字标定
综合精度	Accuracy class	0.01%F.S.
通讯接口	Communication interface	RS232/蓝牙
储存温度	Storage temperature	-30~80°C
工作温度	Operation temperature range	-10~60°C
相对湿度	Relative humidity	≤85%RH
防护等级	Protection class	IP65
重量	Weight	0.5kg
采集频率	Acquisition frequency	≤800HZ
通讯协议	Communication protocol	ARSCII
外壳材料	Material	Plastic shell(塑胶壳)