



安装尺寸 MOUNTING DIMENSION

压式结构 Compression Load cell

MS1002

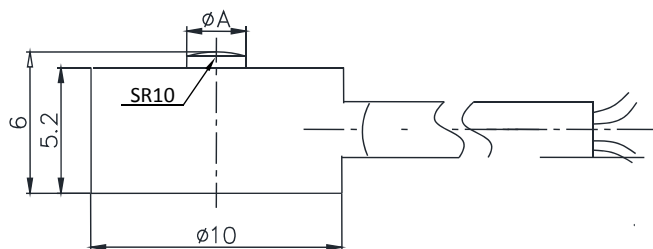

Capacity(N)	A	Material	Weight Approx
50,100	1.5	不锈钢/Stainless steel	0.1kg
200	2	不锈钢/Stainless steel	0.1kg
500,1000	2.5	不锈钢/Stainless steel	0.1kg


技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
额定容量	Capacity	50,100,200,500,1000N
输出灵敏度	Rated output	1.0±20mV/V
零点输出	Zero balance	±2%F.S.
非线性	Non-linearity	0.2%F.S.
滞后	Hysteresis	0.2%F.S.
重复性	Repeatability	0.2%F.S.
温度灵敏度漂移	Temp.effect on output	0.05%F.S./10℃
零点温度漂移	Temp.effect on zero	0.05%F.S./10℃
输入电阻	Input impedance	800~1100Ω
输出电阻	Output impedance	800~1100Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Recommended excitation	3~10V
最大激励电压	Maximum excitation	10V
温度补偿范围	Compensated temp rang	-10~60℃
工作温度范围	Operation temp range	-20~80℃
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	Φ2x3000mm

特点和用途 FEATURES & APPLICATIONS

- ◆ 高度低, 变形量小, 外形尺寸小
- ◆ 不锈钢材料, 动态响应频率高
- ◆ 适用于汽车压装、自动化组装、3C产品测试、新能源产品组装、医疗检测、机器人领域, 模具组装及其他工业测试、测量及控制系统
- ◆ Low height, small deformation, small size
- ◆ Stainless steel material, High dynamic response frequency
- ◆ It is suitable for automobile press assembly, automatic assembly, 3C product testing, new energy product assembly, medical testing, robot field, mold assembly and other industrial testing, measurement and control system

受力方式 Load Direction



配线图 Wiring Code

