


安装尺寸 MOUNTING DIMENSION

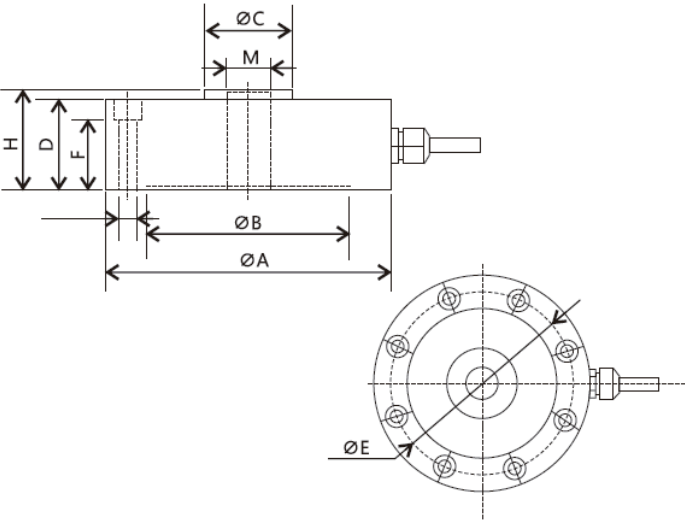

Capacity(t)	
1,2,5,1,0,20	按照(泰科思) F13014450002尺寸设计

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
额定容量	Capacity	1,2,5,10,20T
输出信号	Output signal	4-20mA/0-10V
零点输出	Zero balance	4mA/0mA
非线性	Non-linearity	0.03%F.S.
滞后	Hysteresis	0.03%F.S.
重复性	Repeatability	0.03%F.S.
温度灵敏度漂移	Temp.effect on output	0.02%F.S./10℃
零点温度漂移	Temp.effect on zero	0.02%F.S./10℃
输入电阻	Input impedance	780±10Ω
输出电阻	Output impedance	700±5Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
工作电压	Working voltage	9~30VDC
温度补偿范围	Compensated temp range	-10~60℃
工作温度范围	Operation temp range	-20~80℃
安全超载	Safe overload	200%F.S.
极限超载	Ultimate overload	300%F.S.
电缆线尺寸	Cable size	φ5×6000mm
材料	Material	不锈钢


压式结构/ Compression Load cell MS1057



特点和用途 FEATURES & APPLICATIONS

- 轮辐式压式传感器
- 不锈钢材质
- 防护等级IP67
- 应用于试验机、工程机械、石油开采、港口港机
- 可定制量程及信号输出

受力方式 Load Direction



配线图 Wiring Code

