
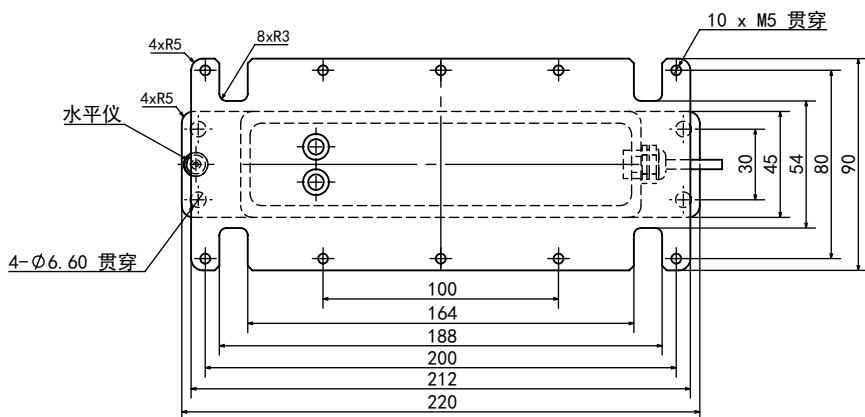


安装尺寸 MOUNTING DIMENSION

MS8091

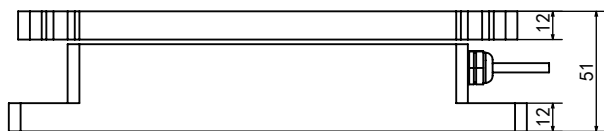

技术参数 TECHNICAL PARAMETERS


参数	Specifications	技术指标/Technique
额定量程	Capacity	4KG,8KG,10KG,15KG
输出灵敏度	Rated output	2.0mV/V±20%
零点输出	Zero balance	±0.05mV/V
非线性	Non-linearity	±0.01%F.S.
滞后	Hysteresis	0.01%F.S.
重复性	Repeatability	0.01%F.S.
输入电阻	Input impedance	410±10Ω
输出电阻	Output impedance	350±5Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Recommended excitation	5~15V
最大激励电压	Maximum excitation Voltage	15V
温度补偿范围	Compensated temp range	-10~60℃
工作温度范围	Operation temp range	-20~80℃
温度灵敏度漂移	Temp.effect on output	0.05%F.S./10℃
零点温度漂移	Temp.effect on zero	0.05%F.S./10℃
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	φ3×3m
材料	Material	铝合金



特点和用途 FEATURES & APPLICATIONS

- ◆ 电子称，称重模块
- ◆ 精度高，安装便捷，可列阵组合多线称重
- ◆ 适用于片剂、点胶、注液系统、胶囊等称重检测
- ◆ Electronic weighing module
- ◆ High precision, convenient installation, array combination multi-line weighing
- ◆ Suitable for tablet, dispensing, liquid injection system, capsule weighing test

受力方式 Load Direction

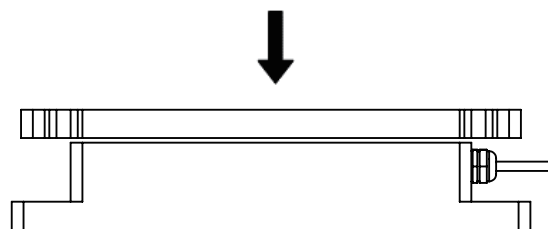

接线方式 Wiring code

