


安装尺寸 MOUNTING DIMENSION

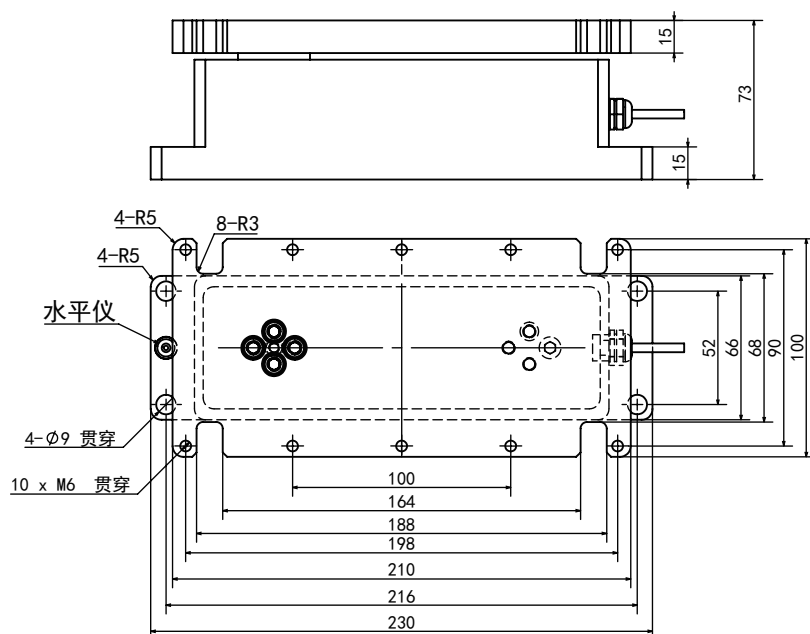

技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
额定量程	Capacity	20KG,30KG,50KG,100KG
输出灵敏度	Rated output	2.0mV/V $\pm$ 20%
零点输出	Zero balance	$\pm$ 0.05mV/V
非线性	Non-linearity	$\leq$ 0.01%F.S.
滞后	Hysteresis	0.01%F.S.
重复性	Repeatability	0.01%F.S.
输入电阻	Input impedance	410 $\pm$ 10 Ω
输出电阻	Output impedance	350 $\pm$ 5 Ω
绝缘电阻	Insulation	$\geq$ 5000M Ω /100VDC
激励电压	Recommended excitation	5~15V
最大激励电压	Maximum excitation Voltage	15V
温度补偿范围	Compensated temp range	-10~60 $^{\circ}$ C
工作温度范围	Operation temp range	-20~80 $^{\circ}$ C
温度灵敏度漂移	Temp.effect on output	0.05%F.S./10 $^{\circ}$ C
零点温度漂移	Temp.effect on zero	0.05%F.S./ $^{\circ}$ C
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	ϕ 5x3m
材料	Material	铝合金


MS8090



特点和用途 FEATURES & APPLICATIONS

- ◆ 电子称，称重模块
- ◆ 精度高，安装便捷，可列阵组合多线称重
- ◆ 适用于片剂、点胶、注液系统、胶囊等称重检测
- ◆ Electronic weighing module
- ◆ High precision, convenient installation, array combination multi-line weighing
- ◆ Suitable for tablet, dispensing, liquid injection system, capsule weighing test

受力方式 Load Direction

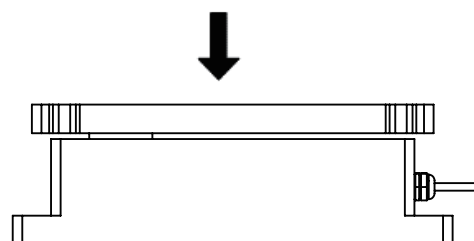

接线方式 Wiring code

