


安装尺寸 MOUNTING DIMENSION

MS8084

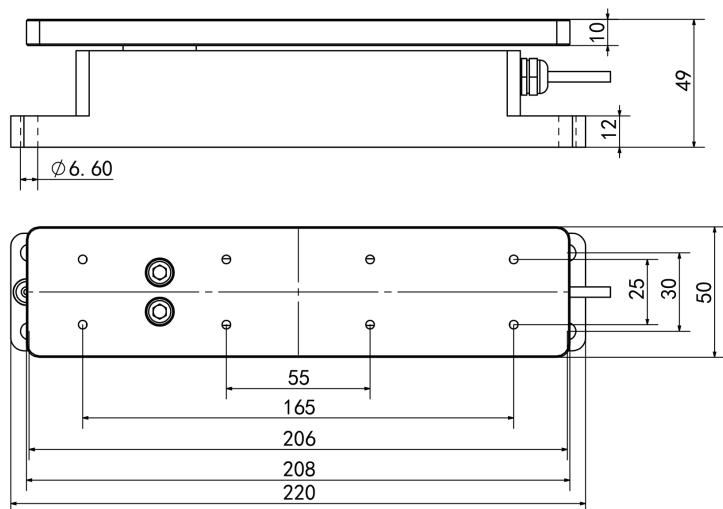


技术参数 TECHNICAL PARAMETERS

参数	Specifications	技术指标/Technique
量程范围	Capacity	4kg, 8kg, 10kg, 15kg
灵敏度	Rated output	2.0mV/V $\pm$ 20%
零点	Zero bhnce	$\pm$ 0.05mV/V
非线性	Non-linearity	$\leq$ 0.01%F.S.
滞后	Hysteresis	$\pm$ 0.01%F.S.
重复性	Repeatability	$\pm$ 0.01%F.S.
蠕变 (30min)	Creep (30min)	$\pm$ 0.01%F.S.
温度灵敏度漂移	Temp effect on output	0.05%F.S./10 $^{\circ}$ C
零点温度漂移	Temp effect on zero	0.05%F.S./10 $^{\circ}$ C
输入电阻	Input impedance	410 $\pm$ 10 Ω
输出电阻	Output impedance	350 $\pm$ 5 Ω
绝缘电阻	Insulation	$\geq$ 5000M Ω /100VDC
激励电压	Excitation Voltage	5-15V
最大激励电压	MAX excitation Voltage	15V
温度补偿范围	Compensated temp range	-10 $^{\circ}$ ~60 $^{\circ}$ C
工作温度范围	Operation temp range	-20 $^{\circ}$ ~80 $^{\circ}$ C
安全超载	Safe overload	150%F.S.
极限超载	Ultimate overload	200%F.S.
电缆线尺寸	Cable size	ϕ 3 $\times$ 3000mm
材料	Material	铝合金
防护等级	Protection calss	IP65

特点和用途 FEATURES & APPLICATIONS

- ◎ 铝合金材料
- ◎ 精度高、抗偏载能力强
- ◎ 容易安装，IP65
- ◎ 体积小，外型美观
- ◎ Aluminum alloy Material
- ◎ High precision ,strong anti-bias load ability
- ◎ Easy to install,IP65
- ◎ Small size and beautiful appearance

受力方式 Load Direction

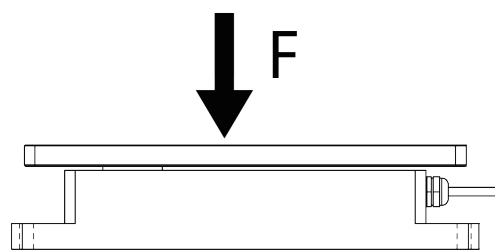

接线方式 Wiring code

