

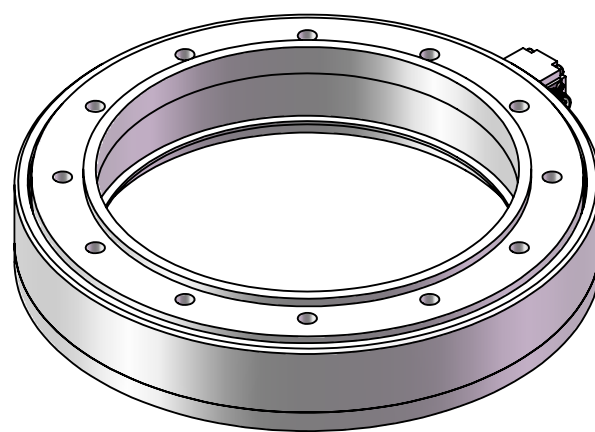
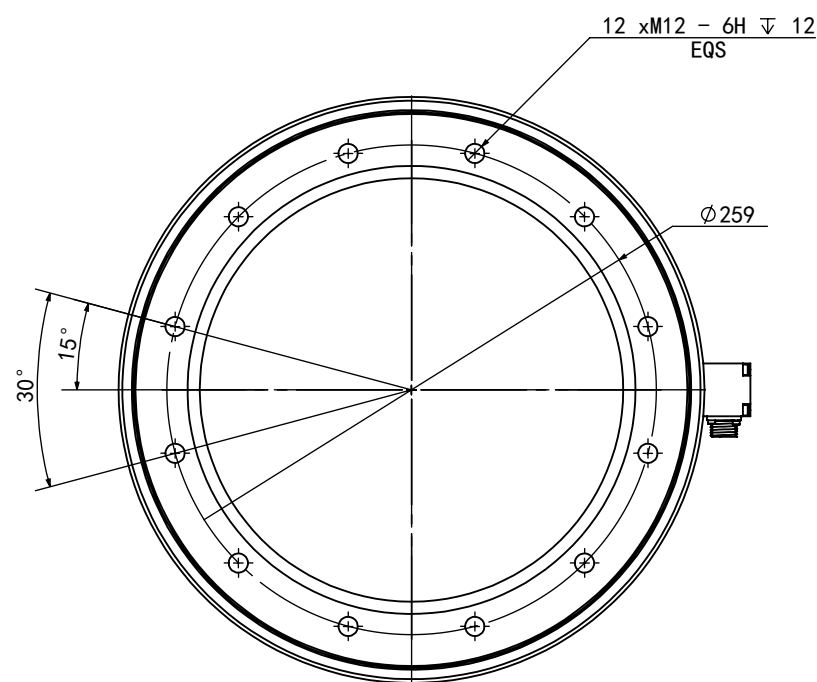
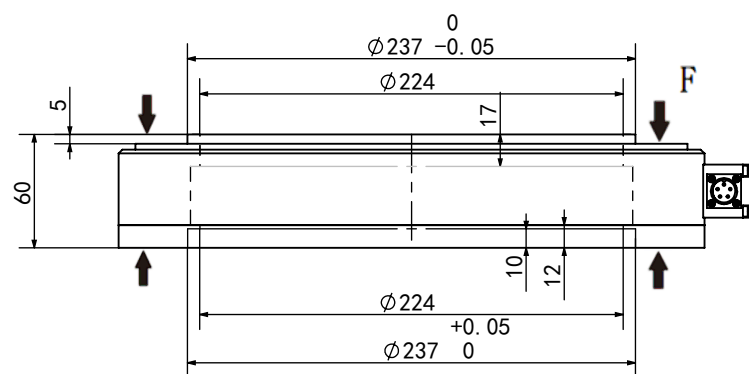


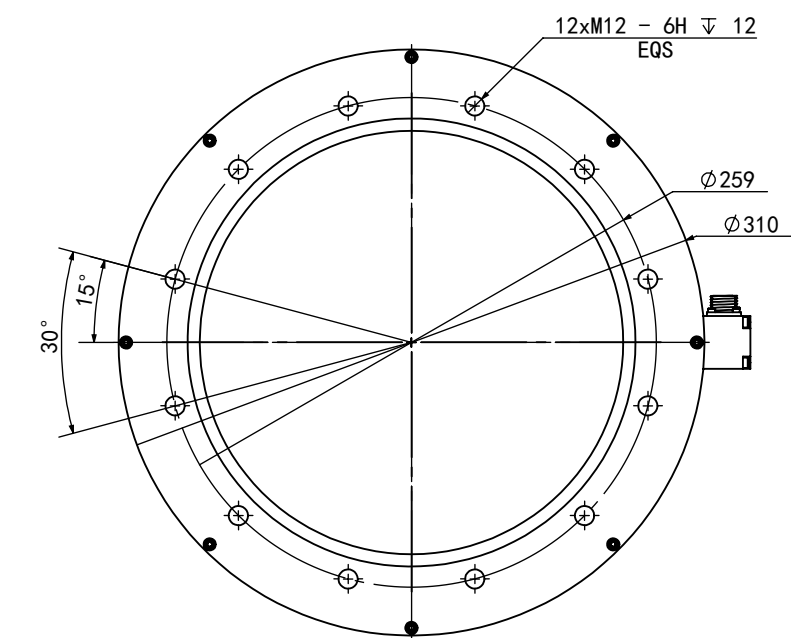


技术参数 TECHNICAL PARAMETERS		
参 数	Specifications	技术指标/Technique
量程范围	Capacity	30KN、40KN
灵敏度	Rated output	1. 0mV/V±20%
零点	Zero blance	±0. 05mV/V
非线性	Non—linearity	≤1%F. S.
滞 后	Hysteresis	±1%F. S.
重复性	Repeatability	±1%F. S.
蠕变（30min）	Creep(30min)	±1%F. S.
温度灵敏度漂移	Temp effect on output	±0. 1%F. S/10℃
零点温度漂移	Temp effect on zero	±0. 1%F. S/10℃
输入电阻	Input impedance	1050±20 Ω
输出电阻	Output impedance	1000±10 Ω
绝缘电阻	Insulation	≥5000M Ω /100VDC
激励电压	Excitation Voltage	5-15V
最大激励电压	Maximum excitation Voltage	15V
温度补偿范围	Compensated temp range	-10 - +60℃
工作温度范围	Operation temp range	-20 - +80℃
安全超载	Safe overload	150%F. S.
极限超载	Ultimate overload	200%F. S.
电缆线尺寸	Cable size	φ 5x12000mm
材料	Material	42CrMo（表面化学镀镍）
		40Cr（表面化学镀镍）
防护等级	Protection calss	IP65

配线图/ Wiring Code

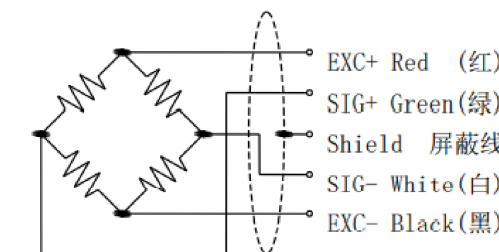

未标偏差极限偏差数值				
尺寸分段	f (精密级)	m (中等级)	c (粗糙级)	v (最粗级)
0—6	± 0.05	± 0.1	± 0.2	± 0.5
6—30	± 0.1	± 0.2	± 0.5	± 1
30—120	± 0.15	± 0.3	± 0.8	± 1.5
120—400	± 0.2	± 0.5	± 1.2	± 2.5
400—1000	± 0.3	± 0.8	± 2	± 4
1000—2000	± 0.5	± 1.2	± 3	± 6
2000—6000	± 1	± 2	± 4	± 8



比例 1 : 1

设计

制图

审核

批准

MS1075外形参数

日期: 25/6/5

版本号: B

材料：